


SC-651 (50W)

Paging Horn Speaker



- 50W rated input reflex horn speaker (Mobile mount use: 30W).
- 250 - 6,000 Hz frequency response.
- 16 ohms impedance.
- Newly developed polyimide diaphragm ensures durability during 50W output.
- Weather-resistant to withstand demanding environmental conditions
- Shock-resistant aluminum oval horn
- Steel mounting brackets for easy installation and aiming in wall, pole or ceiling-mount applications

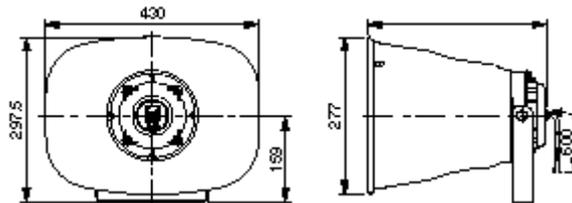

Specifications	
Rated Input	50 W (Mobile mount use; 30W)
Rated Impedance	16 ohms
Sensitivity	109dB (1W/1m)
Frequency Response	250 - 6,000 Hz
IP Code	IP 65
Polarity	Hot; Black, Com; White
Operating Temperature	-20°C to +55°C (-4°F to +131°F) (must be free from dew condensation)
Finish	Horn flare; Aluminum, off-white, powder coating Reflector horn; ABS resin, off-white Bracket holder; Aluminum, gray, powder coating Bracket; Steel, gray, powder coating Rear cover; ABS resin, gray Screws and bolts; Stainless steel Speaker cable; Polyvinyl chloride insulated cable (6mm in diameter, 600mm in length)
Dimensions	430(W) x 297.5(H) x 327(D) mm (16.93" x 11.71" x 12.87")
Weight	3.4 kg (7.50 lb)