


CS-154 (15W)

Wide Renge Weatherproof Speakers



- Constant directivity horn improve directivity characteristics and ensure uniform and clear sound dispersion.
- Lightweight ABS resin enclosure that is mechanically strong and resistant to impact.
- Weatherproof polyurethane resin paint permits the speaker to stand up to many years of outdoor installation.
- Stainless steel hardware protects the speaker from corrosion.
- The enclosure complies with IP-64 Standards for dust proof and waterproof characteristics.
- Rotary impedance selector switch facilitates external changes in impedance during and after speaker installation.

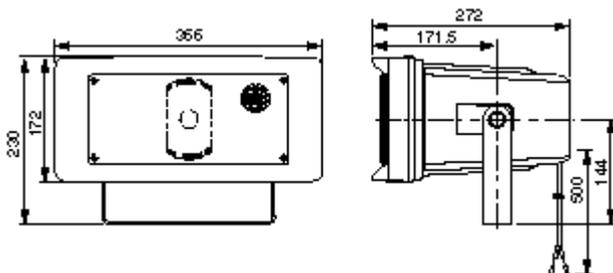

Spec	
Rated Input	CS-154: 15W
Rated Impedance	CS-154: 100 V line; 670Ω (15W), 1kΩ (10W), 2kΩ (5W), 70 V line; 330Ω (15W), 670Ω (7.5W), 1kΩ (5W), 2kΩ (2.5W)
Sound Pressure Level	BS-154: 97dB (1W, 1m)
Frequency Response	BS-154: 150 - 15,000Hz
Speaker Component	12cm cone-type dynamic speaker (treated for splash proof)
Horizontal Directivity	Constant directivity horn 90° (± 45° horizontal from front axis)/Over 93dB (1W, 1m), 3kHz at ± 45°
Speaker Code	2-core cabtyre cable with diameter of 6mm
Finish	Horn, cover; ABS resin, off-white, paint Bracket; Stainless stee /Net; Aluminum, gray, paint/Screw; Stainless steel
Dimensions	366 (W) × 230 (H) × 272 (D)mm
Weight	BS-154: 2.8kg